


38

AG series

x38x28mm

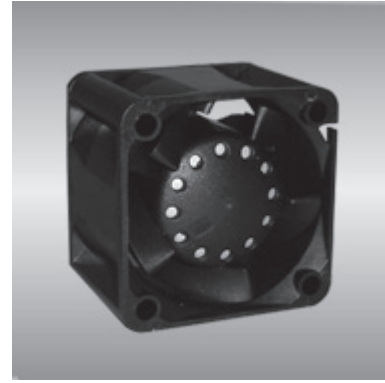



General Specifications

- Motor : 4 Poles brushless DC motor
- Frame & Impeller : Plastic(UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

Model	*Bearing System	Rated Voltage	Operating Voltage Range	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	Weight
Part NO.	B / S / F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE03828_12L	B	12	7.0~13.2	0.21	8000	0.26	9.44	10.02	0.39	38.0	40
AGE03828_12M	B	12	7.0~13.2	0.30	10000	0.35	12.46	12.46	0.63	44.0	40
AGE03828_12H	B	12	7.0~13.2	0.50	13000	0.46	16.30	25.91	1.02	51.0	40
AGE03828_12U	B	12	7.0~13.2	0.82	15000	0.54	19.16	34.71	1.37	55.0	40
AGE03828_12V	B	12	7.0~13.2	1.00	17000	0.59	20.80	42.40	1.67	59.0	40

*Bearing system B: Two Ball Bearing F: Fluid Bearing S: Sleeve Bearing

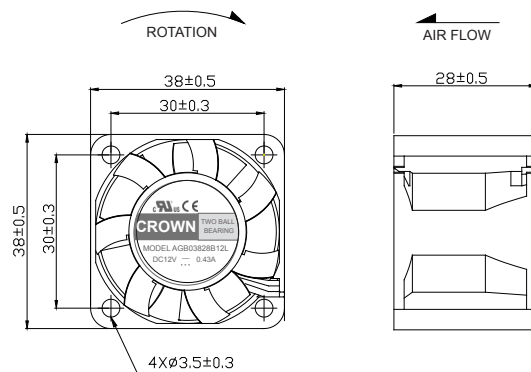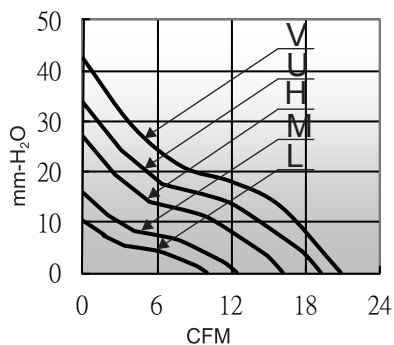

unit:mm